


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
03.05	0	01	PN-241	15.03.06	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT	

WORK POSITIONING LANYARD (PN-241)

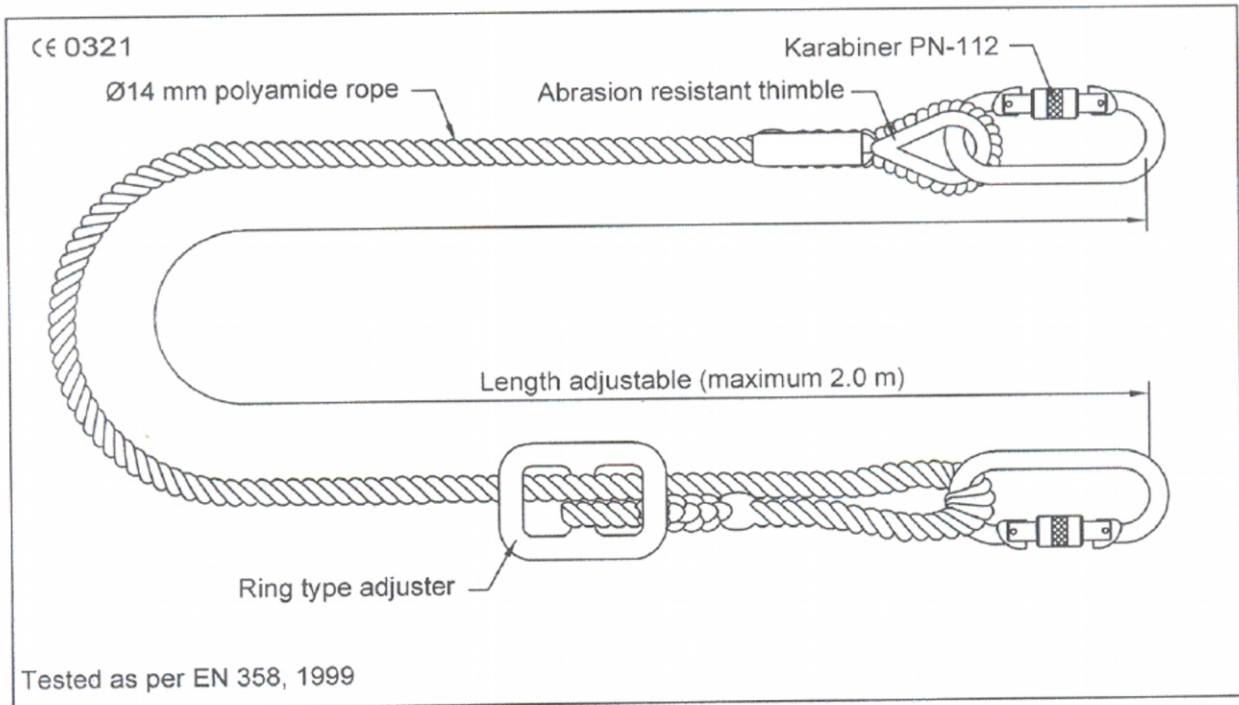

DESIGN

- Rope ends spliced and covered with polyethylene protective sleeve
- Abrasion resistant thimbles provided within loops
- Adjustable length upto 2 meters maximum
- Adjustment by use of ring type adjuster
- Karabiners (PN-112) provide at both end for attachment

ROPE

- Rope used comply to ISO 1140
- Ø14 mm three strand polyamide rope
- Green strand in the rope to indicate degradation of material
- Breaking strength minimum 30 KN

RING TYPE ADJUSTER

- Material : Forged alloy steel rope adjuster ring
- Plating : Electro deposited Nickle Chrome
- Finish : Deburred & Polished

VITAL TEST COMPLIANCE

- Static Strength : 15 KN for 3 Minutes
- Dynamic strength : Free fall from 1 meter height with a test mass of 100 kg

WEIGHT

- : 770 gm ±10%