
DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
03.05	0	01	PN-02	15.03.06	
TECHNICAL SPECIFICATIONS				SIGNATURE PRESIDENT	

WORK POSITIONING BELT (PN-02)

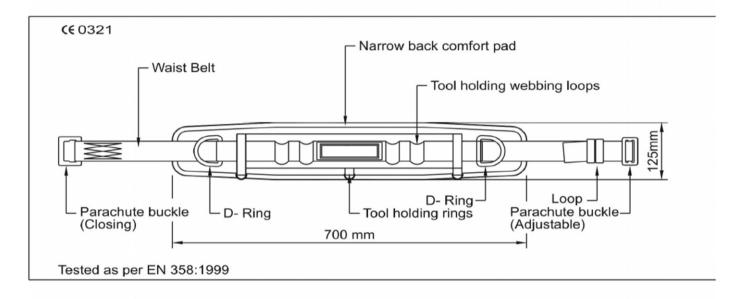

DESIGN

- Two lateral attachment D-ring at waist positioning
- Narrow comfort pad made of foamed EVA with textile on both sides.
- · Waist belt can slide over comfort pad freely.
- · Tool holding loops for holding tools
- Ring for tool bag holding.

WEBBING

Material : PolyesterWidth : 44±1mm

Breaking strength: 30 KN or 3,060 kgf (Min)

STITCHING THREAD

Material : High-tenacity polyamide

Colour : White

METAL COMPONENTS

Material : Steel : Plating : Zinc plating

Finish : Deburred & Polished.

VITAL TEST COMPLIANCE

Static Strength : 15 KN or 1,530 kgf for 3 Minutes at each attachment element.
Dynamic strength: Free fall from 1 meter height donned to a test dummy weighing 100 kg at each attachment.

WEIGHT

• : 530 gm ±10%