


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	AKBLOCK05	05.01.15	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT (TECHNICAL)	

RETRACTABLE FALL ARRESTOR (AKBLOCK05)

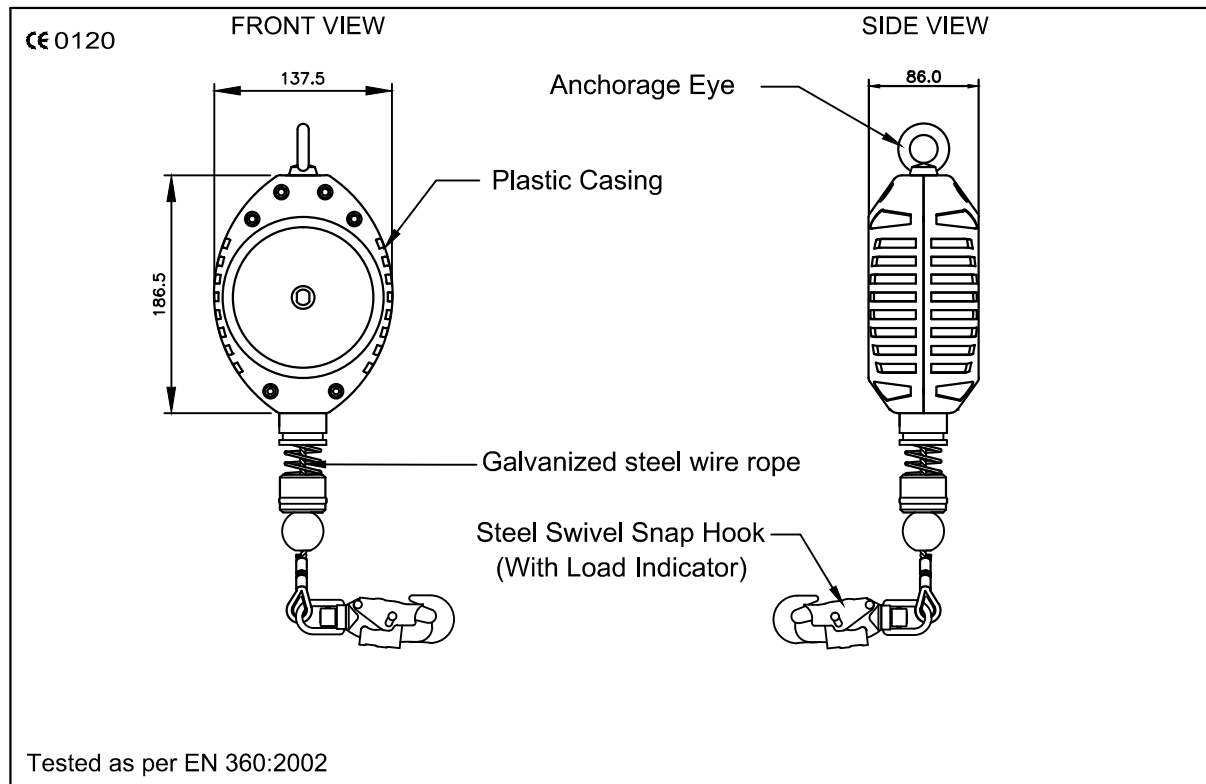

PHYSICAL PARAMETERS

- Robust & durable plastic casing.
- Has swivel eye at anchorage end.
- Steel swivel snap hook with Load Indicator our Ref. PN 123 at attachment end.
- Galvanized steel wire rope (option of having S.S. wire rope available)

LENGTH

- 5 Meters

CABLE

- Material : Galvanized steel wire rope Ø4.5mm.
- Minimum Breaking strength : 15 kN or 1,530 kgf (Min.)

VITAL TEST COMPLIANCE

- Static Strength : 13 kN or 1,325 kgf for 3 Minutes.
- Dynamic performance : 100 kg mass free fall of 600 mm with the breaking force of less than 6 kN & arrest distance less than 2 mts.

NORM

- Meets EN-360:2002

WEIGHT

- 2.97 kg ±0.05kg