


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
03.05	0	01	PN-56	15.03.06	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT	

FULL BODY HARNESS WITH WORK POSITIONING BELT & SIT HARNESS (PN-56)

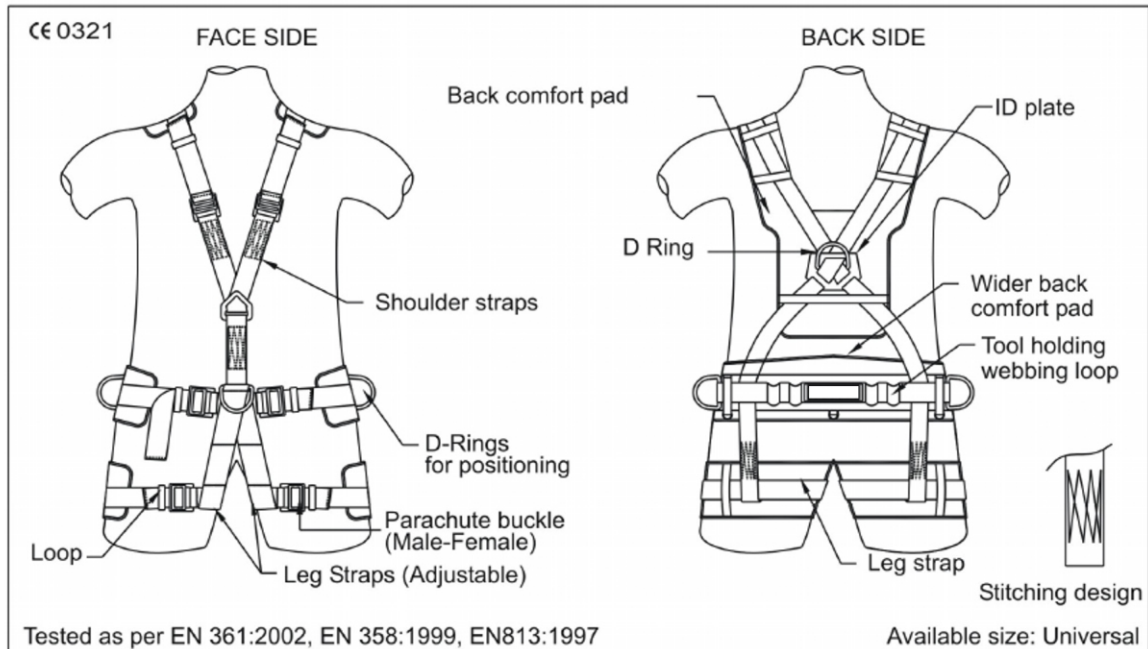

DESIGN

- One dorsal attachment D-ring for fall arrest.
- One front attachment D-Ring at chest for fall arrest.
- Two lateral D-rings at waist for positioning.
- One front D-Ring at waist level for rope access.
- Adjustable shoulder & leg straps.
- Adjustable waist belt.
- Comfort pads on leg straps for extra comfort.

WEBBING

- Material : Polyester
- Width : 44±1mm
- Breaking strength: 25 KN (Min) (For harness)
- Breaking strength: 30 KN (Min) (For Belt only)

STITCHING THREAD

- Material : High-tenacity polyamide
- Colour : White

METAL COMPONENTS

- Material : Steel
- Plating : Zinc plating
- Finish : Deburred & Polished

VITAL TEST COMPLIANCE

- Static Strength : All attachment D-ring tested at 15 KN or 1,530 kgf for 3 Minutes

WEIGHT

- : 1900 gm ±10% gm