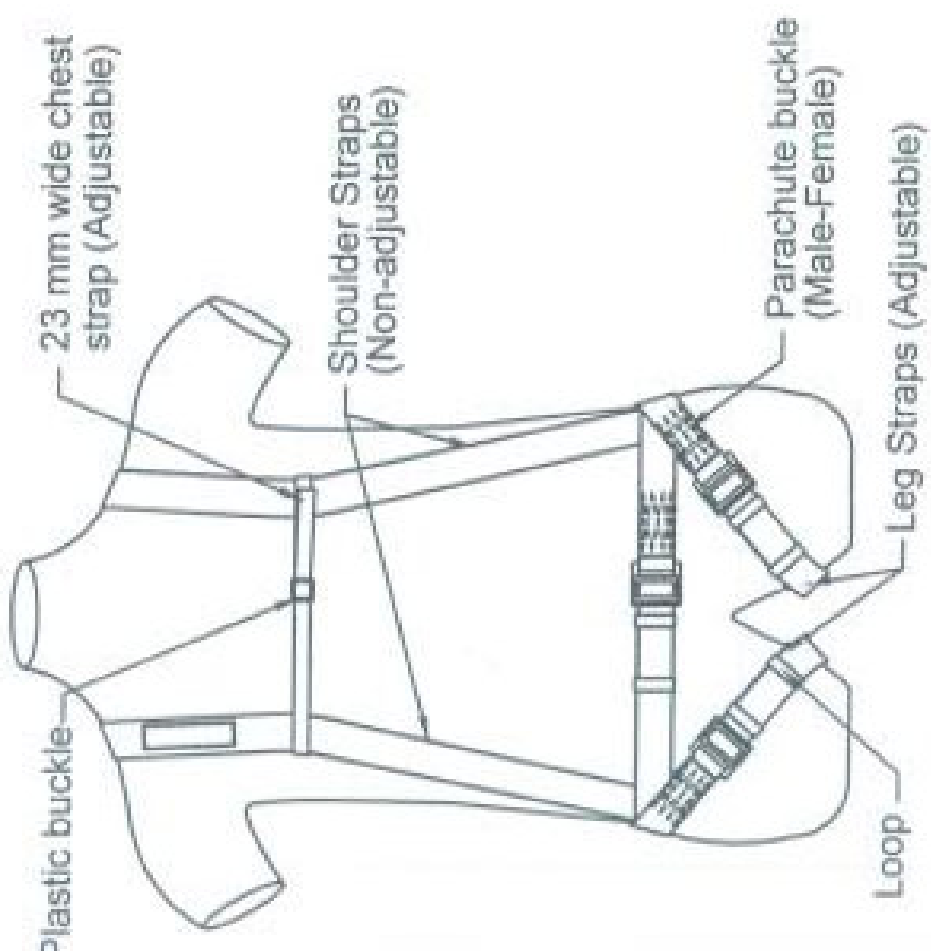
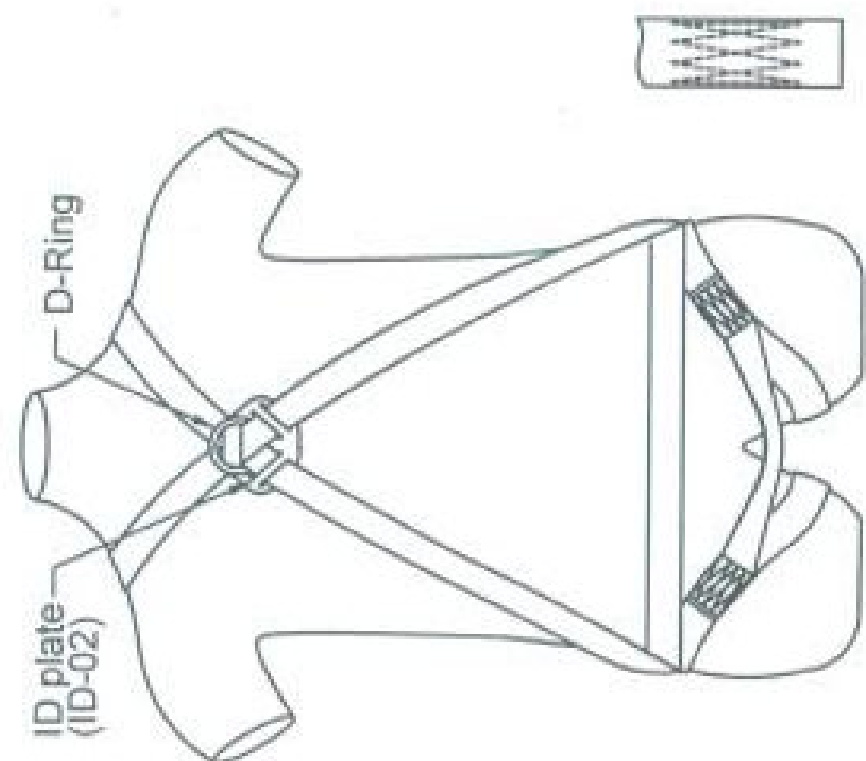


DOC.NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	AK-002	01.07.11	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT (TECHNICAL)	

FULL BODY HARNESS (AK-002)

<p>CC0120 FACE SIDE</p> 	<p>BACK SIDE</p>  <p style="text-align: right;">STITCHING DESIGN</p>
<p>Tested as per EN 361:2002</p> <p>Available size, Small-Medium-Large</p>	

DESIGN

- One dorsal attachment D-ring for fall arrest.
- Adjustable leg straps.

WEBBING

- Material : Polyester.
- Width : 44±1mm.
- Breaking strength : 23 KN (Min).

STITCHING THREAD

- Material : High-tenacity polyamide.
- Colour : White.

METAL COMPONENTS

- Material : High strength steel.
- Plating : Zinc plated.
- Finish : Deburred & Polished.

VITAL TEST COMPLIANCE

- Static Strength : 15 KN or 1,530 kgf for 3 Minutes at each attachment element.
- Dynamic strength : Free fall from 4 meters height donned to a test dummy weighing 100 kg at each attachment element.

WEIGHT

- : 653 gm ±10 gm